

Products to conserve
the eco-system



ACO WILDLIFE

Amphibian Guidance System

*Tunnel and fencing system for amphibians
and other small animals*



The ACO Group

Founded in 1946, the ACO Group is the world leader and pioneer of modular trench drain systems. ACO drainage systems are used in a variety of applications from domestic environments to airports. ACO products have been used at many prestigious locations.

ACO USA was founded in 1978 and is America's foremost manufacturer of trench drainage products.



ACO Wildlife

Working in conjunction with environmental specialists, ACO has utilized its extensive knowledge of surface drainage to develop a proven amphibian tunnel and drift fencing system.

The first tunnel systems were installed in Europe and North America in 1987. Since this date, numerous sites have utilized the ACO tunnel and fencing system.

In comparison to the provision of replacement spawning grounds, wildlife guidance systems are readily accepted by amphibians. The animals are led safely to their habitats: amphibians, reptiles and small mammals can safely cross under roads with a tunnel system and are prevented from reaching the road surface by surrounding fencing - a measure to protect both animals and humans.



Amphibians and Roads

The problem arises from a conflict between the natural migration instincts of animals and increased vehicle traffic and demands for more highways. The best solution is one that works for both motorists and wildlife without compromising the needs of either.




During the Spring mating season amphibians, such as toads and salamanders, seek water to spawn (lay their eggs). Once ground temperatures have risen above freezing, the migration begins. Being nocturnal, amphibians begin to appear at dusk to make their way to a pond to mate. The journey from land to water may be as much as a few miles, taking several days, and crossing one or more roads. In Autumn, the migration is reversed as they seek sheltered ground in preparation for Winter.

The migratory journeys pose risks from vehicles and roads that intersect the migration routes. It takes several minutes to cross a road, and thousands of creatures can be killed in a single evening. This risk affects motorists too - as slippery roads can result and drivers may swerve to avoid amphibians and animals on the road, both leading to possible traffic accidents.

Relocating breeding ponds is not always effective as some amphibians use the new pond and others instinctively returning to their original breeding pond.

Project Design

Tunnels are installed at intervals along the road, between the pond and the Winter habitat. The fence system should be installed to direct the animals towards the tunnel entrance - the best design is to arch or angle the fence so that the toads follow the curve rather than meet a dead end and stop. To ensure the correct layout, the installer should take specialist advice from a qualified herpetologist, biologist or conservation officer.

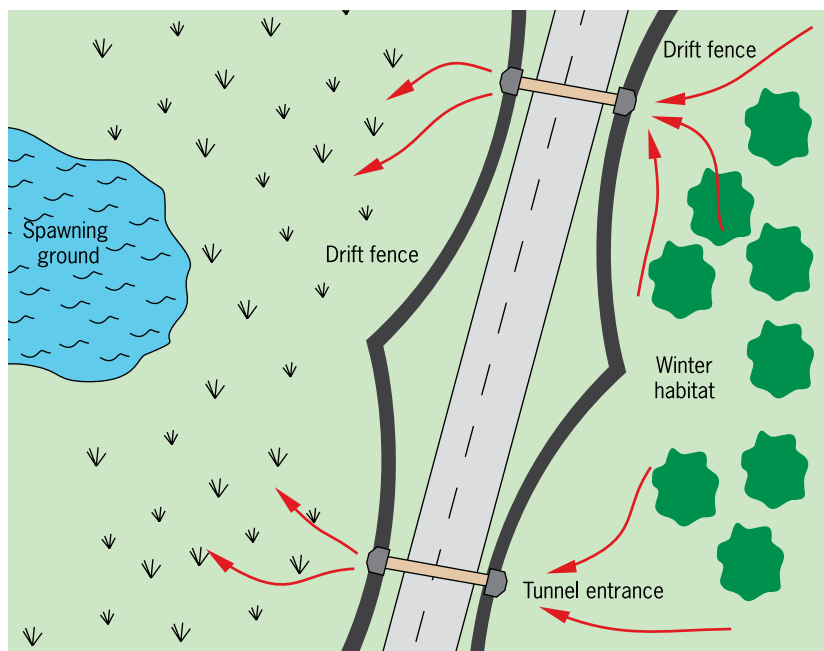

ACO WILDLIFE

Tunnel and Fence Guidance System

The ACO Wildlife Guidance System comprises of three key components:

1 Wildlife Tunnel

Provides a safe route across the road, away from the hazards of vehicles. Also protects road users from the hazard of large volumes of migrating animals.


2 Wildlife Fence

Designed to either use on it's own to contain animals within a specified area, or in conjunction with the tunnel and entrance to guide animal into the tunnel and provide a safe migratory route.

3 Tunnel Entrance Unit

Seamlessly connects the fencing system to the tunnel without gaps that could allow animals access to the road and the dangers that would create.

The fence panels are manufactured from recycled plastic for lightweight shipping and easy installation. Profiled ribs ensure maximum strength to weight ratios.

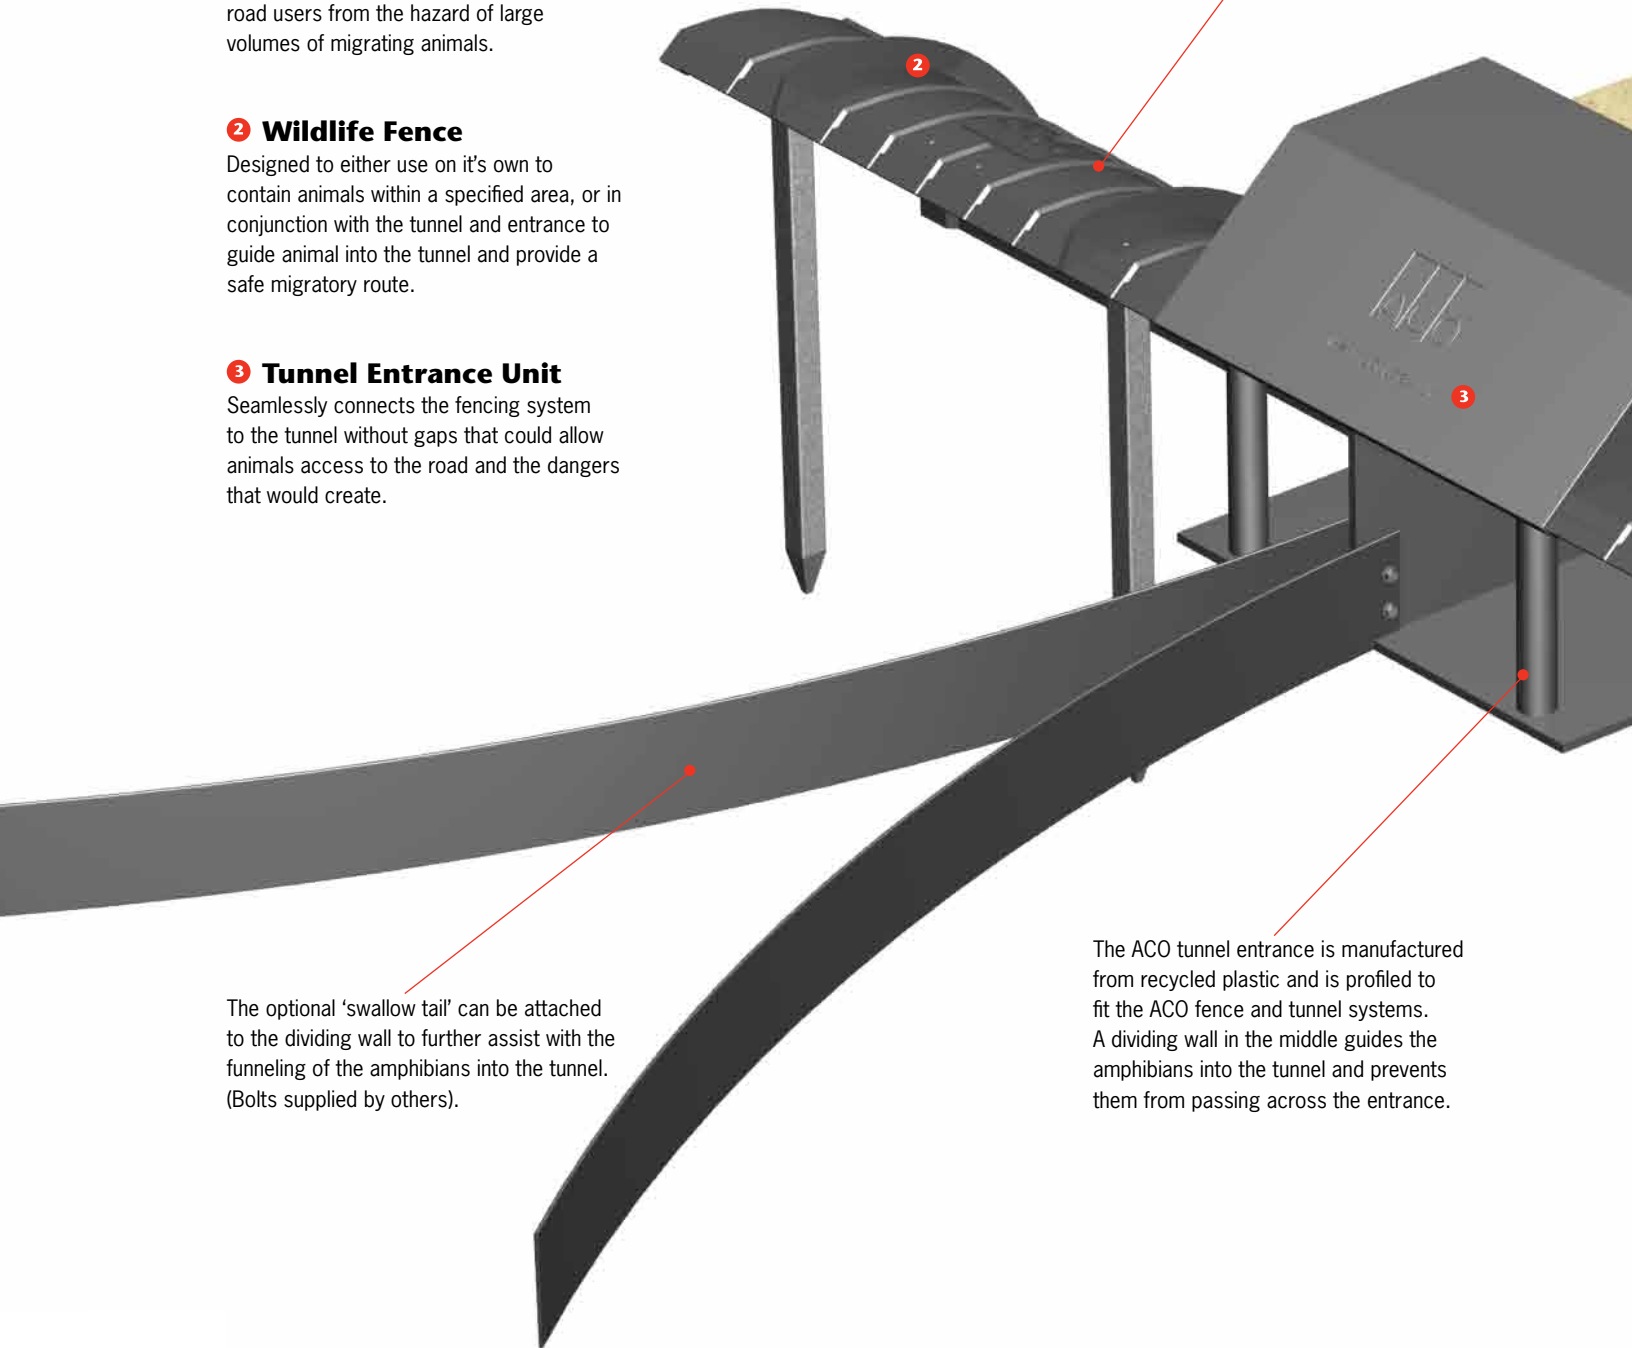

The optional 'swallow tail' can be attached to the dividing wall to further assist with the funneling of the amphibians into the tunnel. (Bolts supplied by others).

The ACO tunnel entrance is manufactured from recycled plastic and is profiled to fit the ACO fence and tunnel systems. A dividing wall in the middle guides the amphibians into the tunnel and prevents them from passing across the entrance.

Slotted upper surface, which enables airflow in and out of the tunnel to ensure climatic conditions remain constant.

Tunnel sections are manufactured from polymer concrete and are resistant to the freeze-thaw cycles due to low water absorption rate. The smooth surface of polymer concrete also ensures that the amphibians can pass safely through the tunnel with no risk of injury.

Road closures and disruptions during installation are minimal as units fit flush to the road surface and low profile (20.47") depth minimizes excavation requirements. Problems with high water tables around pond and marsh areas are also eliminated by this compact depth.



The curved shape of the fence helps prevent animals climbing over from the protected side - but allows animals to climb from the road and drop to safety. The curved shape also offers protection from natural predators and strong sunlight.


Nails hold base securely in the ground. Backfilling with dirt prevents animals digging under the fence.

Posts support the open side of the fence to ensure integrity of shape and prevent collapse of system.


ACO WILDLIFE

Description	Part No.	Length in. (mm)	Width in. (mm)	Height in. (mm)	Wgt lbs
Tunnel					
AT500 Tunnel	18727	39.37 (1000)	23.62 (600)	20.47 (520)	600.0
Fence System					
Fence	99705	39.37 (1000)	20.67 (525)	17.20 (437)	17.6
Post	99708	30.00 (762)	1.57 (70)	-	2.5
Nail (bag of 20)	99710	7.00 (178)	0.25 (6) dia	-	1.5
Tunnel Entrance					
AT500 tunnel entrance	99712	29.53 (750)	21.47 (545)	20.47 (520)	46.0
Swallow tail (optional)	99707	78.74 (2000)	0.25 (6)	5.91 (150)	8.4


Tunnel

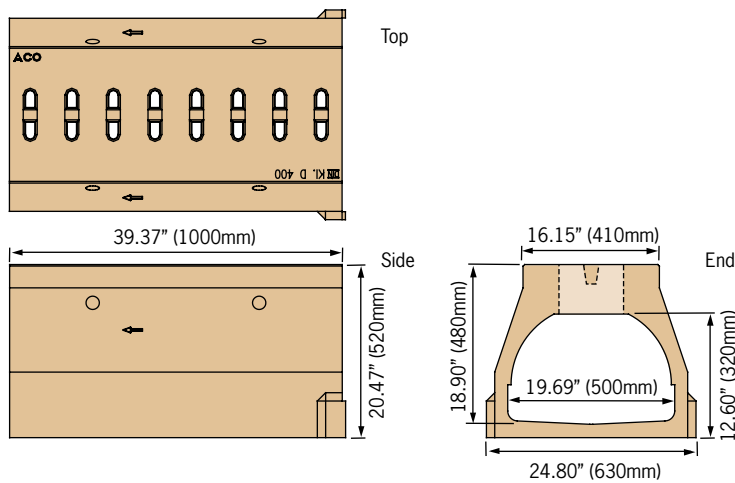


Fence System

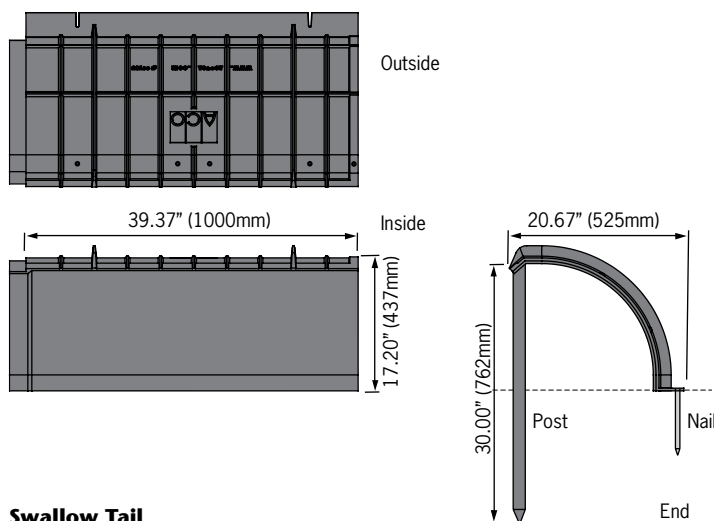


Tunnel Entrance

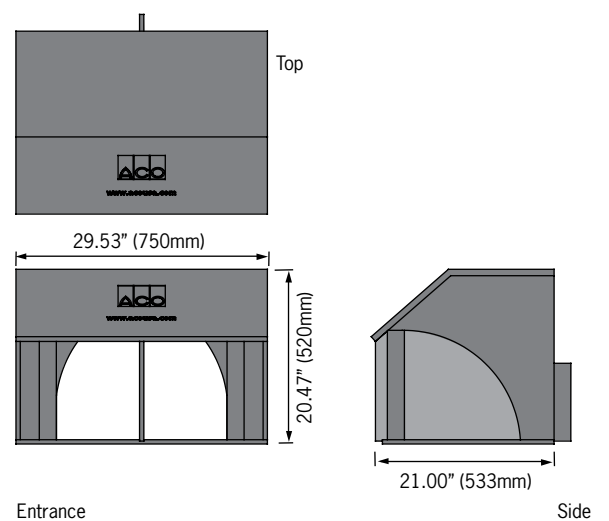

Swallow Tail

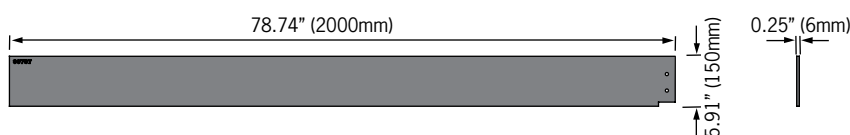

Tunnel Installation

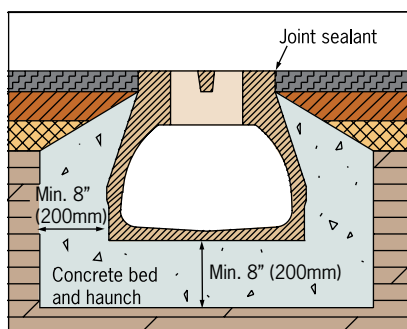

1. Excavation

Excavate to allow a minimum of 8" (200mm) all around tunnel unit. Tunnel units should be flush with surrounding pavement surface. **Ground conditions may require additional dimensions and engineering advice should be taken.**

2. Tunnel layout

Position units in trench and support at correct height using either; stiff/dry mix concrete 'patties' at intervals (two patties per unit), or concrete bricks.

3. Concrete pour

Pour minimum grade 4,000 psi compressive strength cement concrete equally on both sides to avoid disturbing tunnel alignment. Use weight (re-bar or bags of sand) placed inside or on top of tunnels to prevent floating during concrete pour.

Protect top surface with plastic during pour to prevent splashes and ingress into tunnel.

In asphalt installations, avoid contact between compaction equipment and tunnel surface.

ACO recommend the finished pavement be 1/8" above or level with top edge of the tunnel. This protects tunnel edges and prevents ponding as water will drain easily into the tunnel.

4. Finishing

Remove protective plastic from top of tunnel, connect to tunnel entrance and fencing system - checking that there are no gaps. Flush tunnel thoroughly with water to remove debris.

Fencing Installation



1. Ground Preparation

Clear and level ground in a 10 ft. wide strip along proposed line of fence. Slopes should be prepared to give constant gradient. Changes in gradient should be spread over as long a section as possible. Changes in direction should be designed as gentle curves rather than tight shifts in direction. Peg out and check line of the fence in advance of fence construction.



2. Support Posts

Posts must be set at an above ground height of 15.75". In hard ground, it may be necessary to use an auger or similar prior to setting of posts. Where ground conditions prevent posts being driven in to correct height, shorten posts and set in concrete footings (12" x 12" x 12"). Check posts are vertical.



3. Fixing Panels

Position base plates flat on the ground, eliminate any gaps by adding or removing soil along base. Adjacent panels should overlap and be screwed to support posts. Secure base of each fence panel with nails.



4. Backfilling

To discourage amphibians from digging under the fence, the base on the outside of each panel should be covered in compacted soil. Backfill should extend to a height of 10"-12" above base plate, and slope gradually away from fence to ground level. Soil should also be placed and compacted along inside bottom edge of each panel (i.e. side nearest posts) to a depth of 2".



5. Checking

Continually check quality of installation. Check fence is at correct height and there are no gaps. Joints between panels should be watertight to prevent water eroding away compacted soil and creating gaps. Overgrown vegetation should be cut back, or removed, to prevent animals using it to climb over fence.

Swallow tail - bolts to center divider of tunnel entrance. Area between pieces should be filled with earth to ensure animals drop into either side of the entrance.

Maintenance

Regular maintenance of system is important. If surrounding undergrowth is not cut away prior to migration, it could provide bridges which allow creatures to climb over the fence. During inspection check for damage and replace as necessary.



Other ACO product lines

■ ACO DRAIN

ACO Drain is the world's leading modular trench drain system for commercial, industrial and landscape applications.

■ ACO SPORT

ACO Sport is a range of surface drainage and building accessories for track & field, used at Olympic sites since 1972.

■ AQUADUCT

Aquaduct custom designs and manufactures fiberglass trench drain systems to meet individual project requirements.

■ ACO ROAD

ACO Road is a range of surface drainage products engineered for the unique design and performance demands of highways, urban roads and bridges.

■ MARKANT BY ACO

Markant by ACO is a range of building products designed for the residential builder and DIY enthusiast.

■ QUARTZ BY ACO

Quartz by ACO is a range of stainless steel, linear shower drains for custom tiled showers.

ACO Polymer Products, Inc.

East Sales Office

P.O. Box 245
Chardon, OH 44024
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (440) 285-7005

West Sales Office

P.O. Box 12067
Casa Grande, AZ 85130
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Electronic Contact:

info@acousa.com
www.acousa.com

